



# Stainless Steel Braided Flexible Pump Connectors




### ASSEMBLY MATERIALS

**Hose:** 304 Stainless Steel Corrugated Hose

**Braid:** Stainless Steel 304 (8" (200MM) and Larger is Braided Braid)

**Grooved Ends:** CS SCH 40 Grooved Pipe Fitting

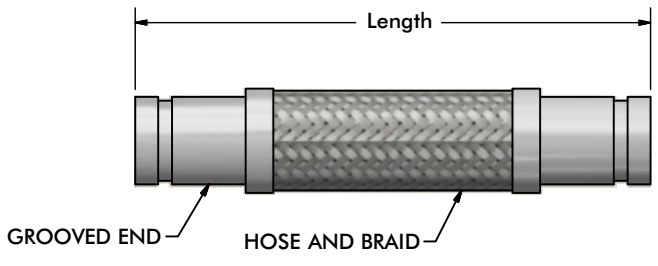

Model No. Nominal Bore x Overall Length	Working Pressure @ 70°F (PSIG)	Working Pressure @ 250°F (PSIG)	Static Bend Radius (mm)	Dynamic Bend Radius (mm)
EFMHPC-GC 2" x 12"	530	466	160	320
EFMHPC-GC 2.5" x 14"	410	360	175	508
EFMHPC-GC 3" x 14"	335	294	231	610
EFMHPC-GC 4" x 15"	240	211	250	749
EFMHPC-GC 5" x 16"	192	168	318	900
EFMHPC-GC 6" x 16"	165	145	353	1050
EFMHPC-GC 8" x 17"	234	205	508	1016
EFMHPC-GC 10" x 18"	230	202	635	1270
EFMHPC-GC 12" x 19"	161	141	762	1524